



12

## EUROPEAN PATENT SPECIFICATION

45 Date of publication of patent specification :  
**11.10.95 Bulletin 95/41**

51 Int. Cl.<sup>6</sup> : **H04B 7/212, H04J 3/16**

21 Application number : **91102797.7**

22 Date of filing : **26.02.91**

54 **Multidirection multiplex communication system.**

30 Priority : **27.02.90 JP 46066/90**

43 Date of publication of application :  
**04.09.91 Bulletin 91/36**

45 Publication of the grant of the patent :  
**11.10.95 Bulletin 95/41**

84 Designated Contracting States :  
**DE FR GB IT**

56 References cited :  
**EP-A- 0 269 120**  
**EP-A- 0 322 029**  
**PATENT ABSTRACTS OF JAPAN vol. 006, no.**  
**132 (E-119)17 July 1982**

73 Proprietor : **NEC CORPORATION**  
**7-1, Shiba 5-chome**  
**Minato-ku**  
**Tokyo (JP)**

72 Inventor : **Shinmiyo, Saburo**  
**c/o Nec Corporation,**  
**7-1, Shiba 5-chome**  
**Minato-ku, Tokyo (JP)**

74 Representative : **VOSSIUS & PARTNER**  
**Postfach 86 07 67**  
**D-81634 München (DE)**

**EP 0 444 592 B1**

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

## Description

The present invention relates to a TDM/TDMA (Time Division Multiplex/Time Division Multiple Access) multidirection multiplex communication system of the type using a demand assignment protocol and, more particularly, to the arrangement of frames which increases the transmission efficiency and reduces transmission delay time in the system.

A multidirection multiplex communication system is elaborated to promote efficient communications between a single central station and a plurality of geometrically scattered subscriber stations. The central station transmits given information to the individual subscriber stations in a TDM mode, while each subscriber station separates information meant therefor from the received information. The subscriber stations each sends given information in the form of a burst signal to the central station only during an assigned time slot in a TDMA mode. In the system, the central station provides the reference on the TDM/TDMA frame for all the subscriber stations, and each subscriber station transmits the burst signal in accordance with the TDM/TDMA frame regenerated from the received signal sent from the central station. This kind of system is desired to have a simple configuration and a high transmission efficiency for transmitting comparatively small information capacities.

TDMA systems are generally classified into two types, i.e., a preassignment type system and a demand assignment type system. The preassignment type system is such that a particular time slots is assigned to each subscriber station. In the demand assignment type system, each subscriber station remains silent except for the time when it needs to transmit information, thereby increasing number of time slots available for the other subscriber stations. With the demand assignment type system, therefore, it is necessary to add preamble words for timing recovery to the heads of the burst signals sent from the subscriber station. For details of a demand assignment type multidirection multiplex communication system, a reference may be made to US-A-4, 653, 049 granted to the same inventor as the present invention.

EP-A-269120 discloses a TDMA communication system with time slots for system maintenance. A fault identification circuit detects an acknowledgment for determining the location of a fault.

However, the problem with the conventional demand assignment type multidirection multiplex communication system is that it cannot increase the transmission efficiency or reduce the transmission delay time satisfactorily due to the TDM/TDMA FRAME arrangement particular thereto.

It is therefore an object of the present invention to provide an improved multidirection multiplex communication system capable of enhancing efficient

transmission and reducing the transmission time. This object is solved with the features of the claims.

As subsequently described, in a TDM/TDMA multidirection multiplex communication system of a demand assign type in which M (integer) subscriber signals are multiplexed on N (integer smaller than M) radio channels forming a radio frame arrangement in response to every call, the radio frame arrangement comprises an N multiframe format, and each frame of the N multiframe format comprises a frame synchronization signal capable of being arranged in an N multiframe format, a control channel for connection including assignment of conversation channels for call origination and termination, N conversation channels each comprising a time slot sufficient in capacity to transmit a main signal, and a channel comprising a subscriber identification number, information of call origination and termination, an error check bits.

Furthermore, as described subsequently, in a TDM/TDMA multidirection multiplex communication system of a demand assign type in which M (integer) subscriber signals are multiplexed on N (integer smaller than M) radio channels forming a radio frame arrangement in response to every call, the radio frame arrangement comprises an N/I (I being an integer dividing N) multiframe format, and each frame of the N/I multiframe format comprises a frame synchronization signal capable of being arranged in an N/I multiframe format, a control channel for connection including assignment of conversation channels for call origination and termination, N/I conversation channels each comprising a time slot sufficient in capacity to transmit a main signal, and a channel comprising a subscriber identification number, information of call origination and termination, and error check bits.

Further, in a subsequently described TDM/TDMA multidirection multiplex communication system of a demand assign type in which M (integer) subscriber signals are multiplexed on N (integer smaller than M) radio channels forming a radio frame arrangement in response to every call, means for generating the radio frame arrangement comprises a first converting section for converting M (integer) voice signals sent from subscriber stations into M digital data signals, a control section for generating, on determining presence/absence of each of the M voice signals, a control signal for assignment, a subscriber identification number, information of call origination and termination, and error check bits, a selecting section responsive to the control signal for assigning the M digital data signals to N (smaller than M) conversation channels and outputting N digital data signals, a signal generating section for generating a multiframe timing signal and time slot timing signals, a second converting section for converting the information into a burst signal in response to the multiframe timing signal, a third converting section for converting the N digital

data signals into N burst signals, and a multiplexing section for multiplexing the burst signal and the N burst signals.

The above and other objects, features and advantages of the present invention will become more apparent from the following detailed description taken with the accompanying drawings in which:

Fig. 1 is a block diagram schematically showing a conventional multidirection multiplex communication system to which the present invention is applicable;

Fig. 2 shows a conventional radio frame arrangement;

Fig. 3 shows a radio frame arrangement representative of an embodiment of the present invention; and

Fig. 4 is a block diagram schematically showing a specific construction of part of the system of Fig. 1.

To better understand the present invention, a brief reference will be made to a conventional demand assignment TDM/TDMA multidirection multiplex communication system, shown in Fig. 1. As shown, the system has a subscriber exchange 10, a central station 20, and K subscriber stations 301 to 30K. The subscriber exchange 10 has M subscriber lines 401 to 40M which are connected to the central station 20. The central station 20 connects the subscriber exchange 10 to the subscriber stations 301 to 30K over radio channels. M terminals are connected to the subscriber stations 301 to 30K. The central station 20 has a line selecting circuit 21 which reassembles the M subscriber lines 401 to 40M into N (< M) subscriber lines 501 to 50N. More specifically, the line selecting circuit 21 assigns any of the subscriber lines 401 to 40M on which a call is originated to one of the N subscriber lines 501 to 50N which is idle. A TDM circuit 22 multiplexes signals on the N subscriber lines 501 to 50N into a signal 60 having a radio frame format.

A transmitter 23 modulates and converts the multiplexed signal 60 to a radio frequency signal 61 and transmits the radio frequency signal 61 to the individual subscriber stations 301 to 30K via an antenna 24.

The subscriber stations 301 to 30K have antennas 331 to 33K, respectively, and each receives the signal 61 coming in through the antenna thereof. A receiver 31 demodulates the signal 61 and thereby generates a signal 70 equivalent to the signal 61. The signal 70 is fed to a baseband processing circuit 32. In response, the baseband processing circuit 32 separates a signal on the channel which is assigned to the subscriber station. As a result, the subscriber stations 301 to 30K reproduce subscriber line signals, e.g., 801 to 80I and 80m to 80M and connect themselves to their associated terminals.

A signal line 90 multiplexes signals coming in over the subscriber lines 401 to 40M so as to send

them to a switching center. Fig. 1 shows a communication path in which the signals flow from the central station 20 to the subscriber stations 301 to 30K.

Fig. 2 shows the radio frame format. The N subscriber lines 501 to 50N correspond one-to-one to the time slots of conversation channels CH1 to CHN. The subscriber lines 401 to 40M from the subscriber exchange 10 each is assigned to, among the N time slots on the radio communication path, an idle time slot when a call is originated thereon. It is to be noted that terms "upward" and "downward" which are shown in the figure and will appear hereinafter refer to the subscriber-to-central direction and the central-to-subscriber direction, respectively. A frame synchronization signal F is indicative of the time reference of the radio frame, while a connection control signal C controllably sets up radio channels. The upward direction is implemented with a burst mode using TDMA wherein an assigned time slot is accessed only when connection is needed. The conversation channels CH1 to CHN each is made up of a data time slot DATA and additional bits HK associated with the time slot DATA. The time slot DATA is used to send a main signal and a signaling. The additional bits HK are constituted by an identification (ID) number ADR representative of a subscriber for which information is meant, a message INST indicative of the kind of information such as originating call, transmitting call or an end of conversation, error check bits CRC for monitoring ADR and INST for errors, and guard bits and other additional bits OH provided against upward interburst interference. The ID number ADR, message INST and error check bits CRC are information bits joining in connection.

In operation, the central station monitors the radio channels as to busy/idle and controls the channel assignment in response to terminating call incoming from the subscriber exchange 10 or originating call from the subscriber terminals. Specifically, by using the time slot assigned to the call connection control signal C, the central station reports a terminating call to a subscriber terminal as well as a channel CH for call origination request. Assuming that a terminal connected to a certain subscriber station originates a call, then it multiplexes an ID number ADR particular to the station and a call origination request message INST and then sends them to the central station in the time slot of a particular conversation channel CHi which is assigned thereto over the channel C. When the central station receives the HK bits over the channel CHi correctly as indicated by the error check bit CRC, it assigns the channel CHi to the requesting terminal. Subsequently, the central station updates the assignment of conversation channels and reports it to the respective subscriber stations by the channel C. In the event of terminating call from the subscriber exchange, a subscriber station designated by a subscriber number sent over the channel C multiplexes

its own ID number ADR and a call informing response message INST on the HK bit information of a designated conversation channel CH<sub>i</sub> and then returns them to the central station to set up a channel.

The above-described system sets up channels sequentially by using the respective conversation channels and, therefore, reduces connection loss, compared to channel setting which relies on the channel C only. This contributes a great deal to efficient demand assignment. However, it is necessary with such a system that the conversation channels CH<sub>1</sub> to CH<sub>N</sub> each be provided with the bits HK in addition to the data or main signal time slot DATA. As a result, transmission efficiency in the radio frame, i.e., the ratio of the number of bits actually available for the transmission of a main signal to the total number of bits is reduced. For example, assume that a voice signal is transmitted as a 64 kbps PCM signal, and that the frame period T is 1 msec. Then, the time slot DATA has a bit length  $k$  of  $64(k) \times 1(m) = 64$  bits. On the other hand, assume that the ID number ADR and the message INST each has eight bits and used as a CRC checker (CRC 16), in which case up to  $2^8 = 256$  subscriber terminals and the same number of messages can be accommodated. Then, the additional bits HK has at least a length  $l$  of 32 bits +  $\alpha$  (number of OH bits) with the result that the efficiency of each conversation channel CH is reduced to 2/3. Usually, therefore, a relatively long frame length T is selected to enhance efficient transmission. For example, when a four times longer frame length T, i.e., 4 msec is selected, the transmission efficiency is increased to 16/18 despite that the bit length of data time slot DATA is  $4 \times 64 = 256$  bits, since the additional bits HK is dependent on the required number of bits and not on the transmission rate.

While the foregoing discussion has concentrated only on the efficiency of the individual conversation channels, the efficiency of the whole frame further decreases due to the channels F and C (having  $x$  bits and  $y$  bits, respectively). Especially, when the number N of conversation channels is small, the efficiency noticeably falls.

When the frame period T is increased to achieve an allowable degree of transmission efficiency, the following problem arises. While the subscriber line signals inputted to the system appear continuously, the continuous signal is once transformed into burst signals each having the length of the time slot of the associated conversation channel. Such burst signals are again transformed by each subscriber station to reproduce the continuous signal. In the central station 20, therefore, the TDM circuit 22 once stores the input signal in a memory for the frame period T and reads it out and transmits in a burst during the time slot of the associated conversation channel. Also, in each subscriber station, the baseband processing circuit 32 once stores the successive burst signals in a mem-

ory and reads them out as a low-speed continuous signal. As a result, the down-going signal processing time delays the transmission time by about  $2 \times T$  sec. Likewise, the up-going signal processing time delays it by about  $2 \times T$  sec. The total delay time amounts to about  $4 \times T$  sec except for the propagation delay time particular to the radio section. Assuming that the frame period T is 4 msec, for example, the transmission delay in the system is about 16 msec. When the subscriber line signals are voice signals, such a transmission delay time directly affects the generation of echo. Regarding a conversation between subscriber stations, when the frame period T is 4 msec as mentioned above, the transmission delay time is not negligible due to two round trips. In the event of low-speed data transmission, a much longer frame period has to be used at the sacrifice of response time and, therefore, throughput.

As stated above, the increase in transmission efficiency and the decrease in transmission delay time have heretofore been contradictory to each other.

Referring to Fig. 3, a frame arrangement representative of an embodiment of the present invention is shown. As shown, a unit frame is made up of a frame synchronization signal  $F_i$  ( $i = 1$  to N), a channel C for a connection control signal, N conversation channels CH<sub>1</sub> to CH<sub>N</sub>, and a channel HK<sub>i</sub> ( $i = 1$  to N) for the transmission of additional bits. The frame synchronization signal  $F_i$  appears at a period equal to a unit frame time  $T'$  over N frames, i.e., in a multiframe fashion. Hence, the additional bit transmission channels HK<sub>1</sub> to HK<sub>N</sub> each being associated with the conversation channels CH<sub>1</sub> to CH<sub>N</sub> appear at the N multiframe period. The conversation channels CH<sub>1</sub> to CH<sub>N</sub> each has a data time slot DATA for transmitting a main signal and a signaling associated therewith, and a minimum necessary number of additional bits (OH, Fig. 2; e.g. previously mentioned guard bits). The additional bit transmission channel HK<sub>i</sub> is made up of a subscriber ID number ADR representative of an addressee or an addresser, a message INST indicating a kind of information such as terminating call, originating call or an end of conversation, error check bits CRC, and a minimum necessary number of additional bits.

A specific circuitry construction for providing the radio frame arrangement of the present invention will be described below.

As shown in Fig. 4, the line selecting circuit 21 has line circuits A<sub>1</sub> to A<sub>M</sub>, a selector B, a control C, converters D<sub>1</sub> to D<sub>N</sub>, a reference timing signal generator E, and a converter F. The line circuits A<sub>1</sub> to A<sub>M</sub> detect the states of their associated subscriber lines 401 to 40M, i.e., whether terminating call is or not, and feed their detecting signal  $a_1$  to  $a_M$  to the control C. At the same time, the line circuits A<sub>1</sub> to A<sub>M</sub> convert voice signals from the subscriber exchange 10 into 64 kbps PCM signals or similar digital signals  $b_1$  to  $b_M$ , re-

spectively. The selector B transfers the digital signals b1 to bM to the N idle lines as instructed by the control C. In response to the signals a1 to aM, the control C performs channel assignment, i.e., it generates a control signal c for connecting the subscriber signals b1 to bM to signals e1 to eN which correspond one-to-one to the radio channels CH, while generating control information d meant for the radio channels HK. The reference timing signal generator E outputs reference timing signals f1 to fN for the radio frame to thereby indicate the switching timings among the radio channels. The converters D1 to DN convert successive input signals e1 to eN into burst signals on the basis of the timing signals f1 to fN, respectively. The converter F converts the control information d from the control C into burst signals by using a multiframe reference timing signal g which is also outputted by the reference timing signal generator E. The resulting radio channel signals 501 to 50N and the HK channel signal h are multiplexed by the TDM circuit 22.

The same circuitry construction shown in Fig. 4 may be applied to any of the baseband processing circuits 32 the individual subscriber stations 301 to 30K.

It is noteworthy that the frame arrangement shown in Fig. 3 assigns only one additional bit transmission channel to the whole unit frame in association with the N conversation channels CH1 to CHN. In this respect, the transmission efficiency particular to the conventional conversation channels is expressed as:

$$\frac{k}{l+k}$$

By contrast, the illustrative embodiment achieves a transmission efficiency produced by:

$$\frac{k' \cdot N}{m' \cdot N + Z (=l)} \approx \frac{k'}{m' + l/N} \approx \frac{k'}{k' + l/N} (l' (k'))$$

Especially, the embodiment noticeably improves the transmission efficiency over the range of  $l \approx k$ .

It follows that the transmission efficiency decreases little even when the unit frame time T' is far shorter than the conventional frame time T. For example, when the conventional frame time T of 4 msec, Fig. 2, is reduced to a unit frame time T' of 0.5 msec, a transmission efficiency of N/N+1 is achievable despite that the data length k' is 32 bits for 64 kbps which is the same as the length of the channel HKi. Then, assuming that the number N of conversation channels is sixteen, the delay time in the transmission of the main signal can be reduced to 1/8 although the repetition period of each additional bit transmission channel HKi is  $16 \times 0.5 \text{ (msec)} = 8 \text{ msec}$  which is double the conventional repetition period.

On the other hand, the additional bits transmission channel HKi does not play any essential role during conversation and is needed only at the beginning and end of connection for origination, termination, etc. Therefore, the above-stated change in the transmission delay time is little effected. In fact, a central station and each subscriber station, i.e., their control

circuits need far longer processing time in the event of connection.

Alternatively, use may be made of a plurality of, I, channels for additional bit transmission  $KH_j$  ( $j = 1$  to I and  $i = 1$  to N/I) and an N/I multiframe arrangement. This is also successful in insuring the same additional bit transmission rate as the conventional transmission rate and, yet, eliminating noticeable decrease in transmission efficiency.

Of course, the combination of two additional bit transmission channels and an eight multiframe arrangement will provide a transmission rate as high as the above-stated rate and a transmission efficiency of 16/18.

In summary, the present invention arranges a radio frame in a multiframe configuration, provides each unit frame with an exclusive channel for additional bit transmission in addition to conversation channels, and thereby sends additional bits associated with the individual conversation channels on a multiple frame basis. This allows the frame period to be reduced without any noticeable decrease in transmission efficiency. Hence, the present invention is successful in insuring a required transmission efficiency while reducing the delay time in the transmission of a main signal in the system to a significant degree.

Various modifications will become possible for those skilled in the art after receiving the teachings of the present disclosure without departing from the scope thereof.

## Claims

1. A TDM/TDMA multidirection multiplex communication system of a demand assign type in which M subscriber signals, wherein M is an integer, are multiplexed on N radio channels, wherein N is integer smaller than M, the system providing a radio frame arrangement in response to every call; said radio frame arrangement comprising an N multiframe format consisting of N frames; each frame of said N multiframe format comprising:
  - a frame synchronization signal (F1 to FN) capable of being arranged in an N multiframe format and indicative of the time reference of the frame;
  - a control channel (C1 to CN) for a control signal for connection including assignment of conversation channels for call origination and termination;
  - N conversation channels (CH1 to CHN) each comprising a time slot sufficient in capacity to transmit a main signal; and
  - an additional bit transmission channel (HK1 to HKN) being associated with one of the N

conversation channels and comprising a subscriber identification number, information of call origination and termination, and error check bits.

2. A TDM/TDMA multidirection multiplex communication system of a demand assign type in which M subscriber signals, wherein M is an integer, are multiplexed on N radio channels, wherein N is integer smaller than M, the system providing a radio frame arrangement in response to every call;
  - said radio frame arrangement comprising an N/I multiframe format consisting of N/I frames, wherein I is an integer smaller than N;
  - each frame of said N/I multiframe format comprising:
    - a frame synchronization signal (F1 to FN) capable of being arranged in an N/I multiframe format and indicative of the time reference of the frame;
    - a control channel (C1 to CN) for a control signal for connection including assignment of conversation channels for call origination and termination;
    - N conversation channels (CH1 to CHN) each comprising a time slot sufficient in capacity to transmit a main signal; and
    - I additional bit transmission channels (HK1 to HKN) being associated with conversation channels and comprising a subscriber identification number, information of call origination and termination, and error check bits.
3. A TDM/TDMA multidirection multiplex communication system of a demand assign type in which M subscriber signals, wherein M is an integer, are multiplexed on N radio channels, wherein N is an integer smaller than M, the system providing a radio frame arrangement comprising a multiframe format as defined in Claim 1 or in Claim 2 in response to every call and comprising:
  - means for generating said radio frame arrangement comprising:
    - first converting means for converting M voice signals sent from subscriber stations into M digital data signals;
    - control means (C) for generating, on determining presence/absence of each of said M voice signals, a control signal (c) for assignment, a subscriber identification number, information of call origination and termination, and error check bits;
    - selecting means (B) responsive to said control signal (c) for assigning said M digital data signals to N conversation channels and outputting N digital data signals;
    - signal generating means (E) for generating a multiframe timing signal and time slot timing signals;

second converting means (F) for converting said information into a burst signal in response to said multiframe timing signal;

a third converting means (D1 to DN) for converting said N digital data signals into N burst signals; and

multiplexing means (22) for multiplexing said burst signal and said N burst signals.

## Patentansprüche

1. TDM/TDMA-Mehrriichtung-Multiplexübertragungssystem eines Bedarfszuordnungs-Typs, in welchem M Teilnehmersignale, wobei M eine Ganzzahl ist, auf N Funkkanäle, wobei N eine Ganzzahl kleiner als M ist, multiplexiert werden, wobei das System als Reaktion auf jeden Ruf eine Funkrahmenanordnung bereitstellt;
  - die Funkrahmenanordnung ein aus N Rahmen bestehendes N-Mehrfachrahmenformat aufweist;
  - und jeder Rahmen des N-Mehrfachrahmenformats aufweist:
    - ein Rahmensynchronisationssignal (F1 bis FN), das in einem N-Mehrfachrahmenformat angeordnet werden kann und den Zeitbezug des Rahmens angibt;
    - einen Steuerungskanal (C1 bis CN) für ein Steuerungssignal zur Verbindung einschließlich der Zuordnung von Konversationskanälen für abgehende oder ankommende Rufe;
    - N Konversationskanäle (CH1 bis CHN), wovon jeder einen von der Kapazität her für die Übertragung eines Hauptsignals ausreichenden Zeitschlitz aufweist; und
    - einen zusätzlichen Bitübertragungskanal (HK1 bis HKN), welcher einem der N Konversationskanäle zugeordnet ist und eine Teilnehmeridentifikationsnummer, Information über abgehende oder ankommende Rufe und Fehlerprüfbits aufweist.
2. TDM/TDMA-Mehrriichtung-Multiplexübertragungssystem eines Bedarfszuordnungs-Typs, in welchem M Teilnehmersignale, wobei M eine Ganzzahl ist, auf N Funkkanäle, wobei N eine Ganzzahl kleiner als M ist, multiplexiert werden, wobei das System als Reaktion auf jeden Ruf eine Funkrahmenanordnung bereitstellt;
  - wobei die Funkrahmenanordnung ein aus N/I Rahmen bestehendes N/I-Mehrfachrahmenformat aufweist, wobei I eine Ganzzahl kleiner als N ist;
  - und jeder Rahmen des N/I-Mehrfachrahmenformats aufweist:
    - ein Rahmensynchronisationssignal (F1 bis FN), welches in einem N/I-Mehrfachrahmen-

format angeordnet werden kann und den Zeitbezug des Rahmens angibt;

einen Steuerungskanal (C1 bis CN) für ein Steuerungssignal zur Verbindung einschließlich der Zuordnung von Konversationskanälen für abgehende oder ankommende Rufe;

N Konversationskanäle (CH1 bis CHN), wovon jeder einen von der Kapazität her für die Übertragung eines Hauptsignals ausreichenden Zeitschlitz aufweist; und

I zusätzliche Bitübertragungskanäle (HK1 bis HKN), welche Konversationskanälen zugeordnet sind und eine Teilnehmeridentifikationsnummer, Information über abgehende oder ankommende Rufe und Fehlerprüfbits aufweisen.

3. TDM/TDMA-Mehrriechungs-Multiplexübertragungssystem eines Bedarfszuordnungs-Typs, in welchem M Teilnehmersignale, wobei M eine Ganzzahl ist, auf N Funkkanäle multiplexiert werden, wobei N eine Ganzzahl kleiner als M ist, wobei das System eine Funkrahmenanordnung bereitstellt, welche ein Mehrfachrahmenformat nach Anspruch 1 oder 2 als Antwort auf jeden Ruf bereitstellt und aufweist:

eine Einrichtung zum Erzeugen der Funkrahmenanordnung mit:

einer ersten Wandlereinrichtung zum Umwandeln von M von Teilnehmerstationen gesendeten Sprachsignalen in M digitale Datensignale;

einer Steuereinrichtung (C), um nach der Erkennung der Anwesenheit/Abwesenheit jedes der M Sprachsignale ein Steuersignal (c) zur Zuordnung, eine Teilnehmeridentifikationsnummer, Information über abgehende oder ankommende Rufe und Fehlerprüfbits zu erzeugen;

einer auf das Steuersignal (c) reagierenden Auswahleinrichtung (B) zum Zuordnen der M digitalen Datensignale auf N Konversationskanäle und zum Ausgeben von N digitalen Datensignalen;

einer Signalerzeugungseinrichtung (E) zum Erzeugen eines Mehrfachrahmenzeittaktsignals und eines Zeitschlitzzeittaktsignals;

einer zweiten Wandlereinrichtung (F) zum Umwandeln der Information in ein Bündelsignal als Reaktion auf das Mehrfachrahmenzeittaktsignal;

einer dritten Wandlereinrichtung (D1 bis DN) zum Umwandeln der N digitalen Datensignale in N Bündelsignale; und

einer Multiplexeinrichtung (22) zum Multiplexieren des Bündelsignals und der N Bündelsignale.

## Revendications

1. Système de communication par multiplexage multidirectionnel TDM/TDMA d'un type affectation à la demande dans lequel M signaux d'abonné, où M est un entier, sont multiplexés sur N canaux radio, où N est un entier inférieur à M, le système générant un agencement de trames radio en réponse à chaque appel ;

ledit agencement de trames radio comprenant un format multitrame N composé de N trames ;

chaque trame dudit format multitrame N comprenant :

un signal de synchronisation de trame (F1 à FN) pouvant être agencé selon un format multitrame N et indicatif de la référence temporelle de la trame ;

un canal de commande (C1 à CN) pour un signal de commande pour une connexion incluant des affectations de canaux de conversation pour une origine et une terminaison d'appel ;

N canaux de conversation (CH1 à CHN), chacun d'entre eux comprenant une tranche de temps de capacité suffisante pour transmettre un signal principal ; et

un canal de transmission de bits supplémentaires (HK1 à HKN) associé à l'un des N canaux de conversation et comprenant un numéro d'identification d'abonné, une information d'origine et de terminaison d'appel et des bits de test d'erreur.

2. Système de communication par multiplexage multidirectionnel TDM/TDMA d'un type affectation à la demande dans lequel M signaux d'abonné, où M est un entier, sont multiplexés sur N canaux radio, où N est un entier inférieur à M, le système générant un agencement de trames radio en réponse à chaque appel ;

ledit agencement de trames radio comprenant un format multitrame N/I composé de N/I trames, où I est un entier inférieur à N ;

chaque trame dudit format multitrame N/I comprenant :

un signal de synchronisation de trame (F1 à FN) pouvant être agencé selon un format multitrame N/I et indicatif de la référence temporelle de la trame ;

un canal de commande (C1 à CN) pour un signal de commande pour une connexion incluant une affectation des canaux de conversation pour une origine et une terminaison d'appel ;

N canaux de conversation (CH1 à CHN), chacun d'entre eux comprenant une tranche de temps de capacité suffisante pour transmettre un signal principal ; et

I canaux de transmission de bits supplé-

mentaires (HK1 à HKN) associés à des canaux de conversation et comprenant un numéro d'identification d'abonné, une information d'origine et de terminaison d'appel et des bits de test d'erreur.

5

3. Système de communication par multiplexage multidirectionnel TDM/TDMA d'un type affectation à la demande dans lequel M signaux d'abonnés, où M est un entier, sont multiplexés sur N canaux radio, où N est un entier inférieur à M, le système générant un agencement de trames radio comprenant un format multitrame selon la revendication 1 ou 2 en réponse à chaque appel et comprenant :

10

des moyens pour générer ledit agencement de trames radio comprenant :

15

des premiers moyens de conversion pour convertir M signaux vocaux émis par des postes d'abonné selon M signaux de données numériques ;

20

des moyens de commande (C) pour générer, lors d'une détermination de présence/absence de chacun desdits M signaux vocaux, un signal de commande (c) pour une affectation, un numéro d'identification d'abonné, une information d'origine et de terminaison d'appel et des bits de test d'erreur ;

25

des moyens de sélection (B) sensibles audit signal de commande (c) pour affecter lesdits M signaux de données numériques à N canaux de conversation et pour générer en sortie N signaux de données numériques ;

30

des moyens de génération de signal (E) pour générer un signal de cadencement multitrame et des signaux de cadencement de tranche de temps ;

35

des seconds moyens de conversion (F) pour convertir ladite information selon un signal de salve en réponse audit signal de cadencement multitrame ;

40

des troisièmes moyens de conversion (D1 à DN) pour convertir lesdits N signaux de données numériques en N signaux de salve ; et

des moyens de multiplexage (22) pour multiplexer ledit signal de salve et lesdits N signaux de salve.


45

50

55



FIG. 1

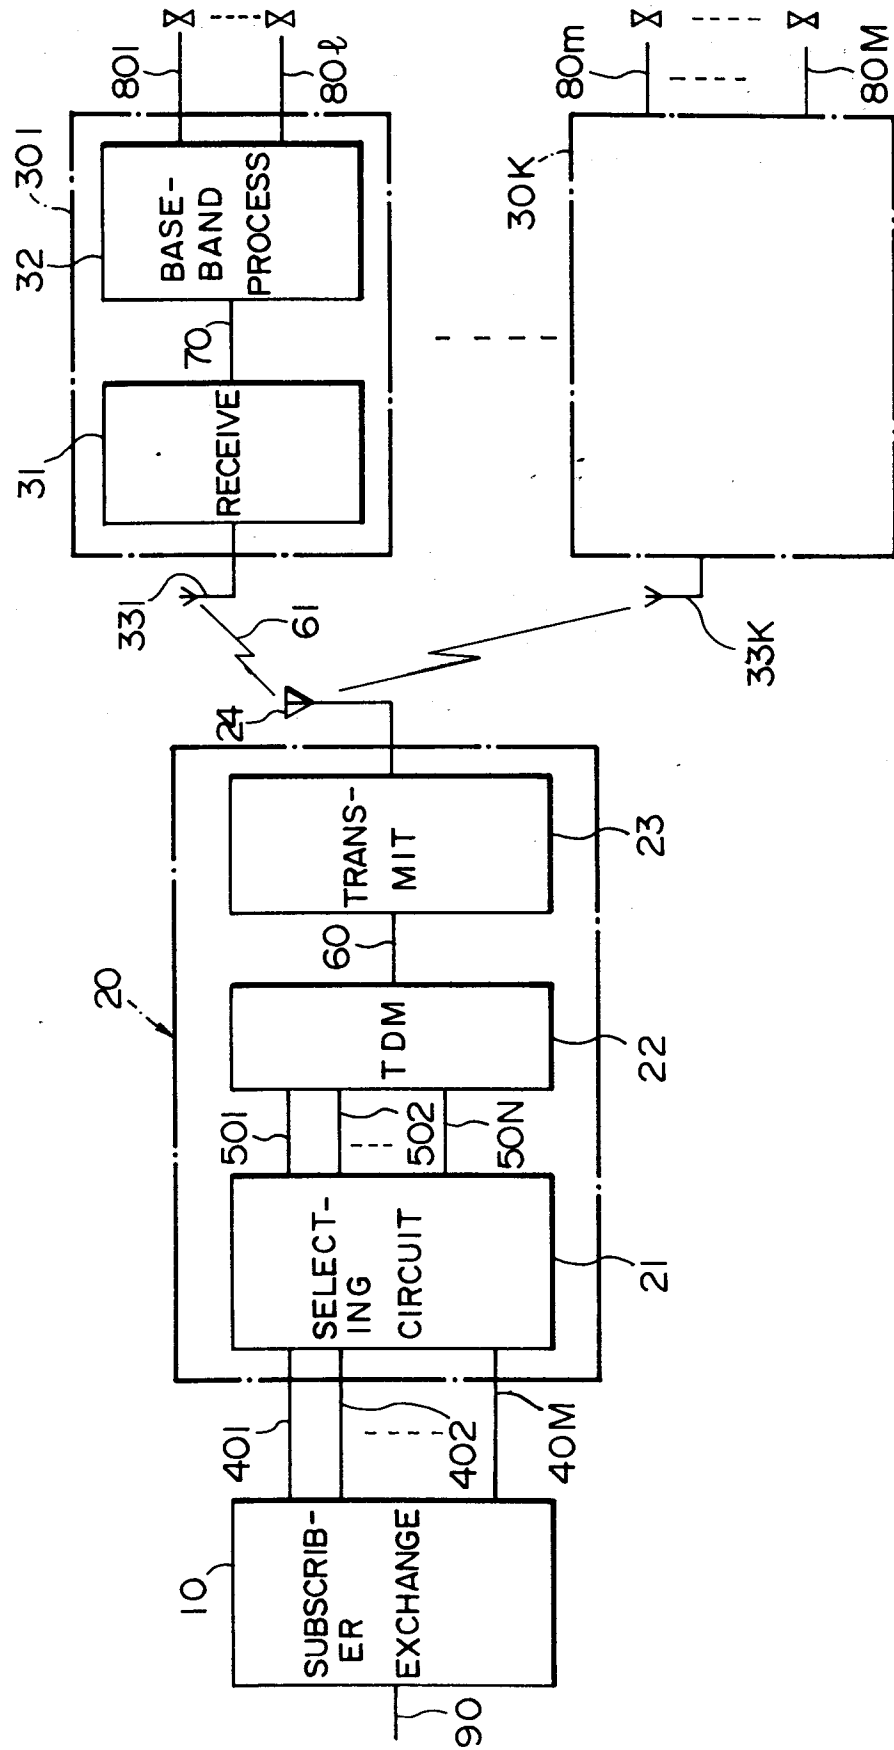

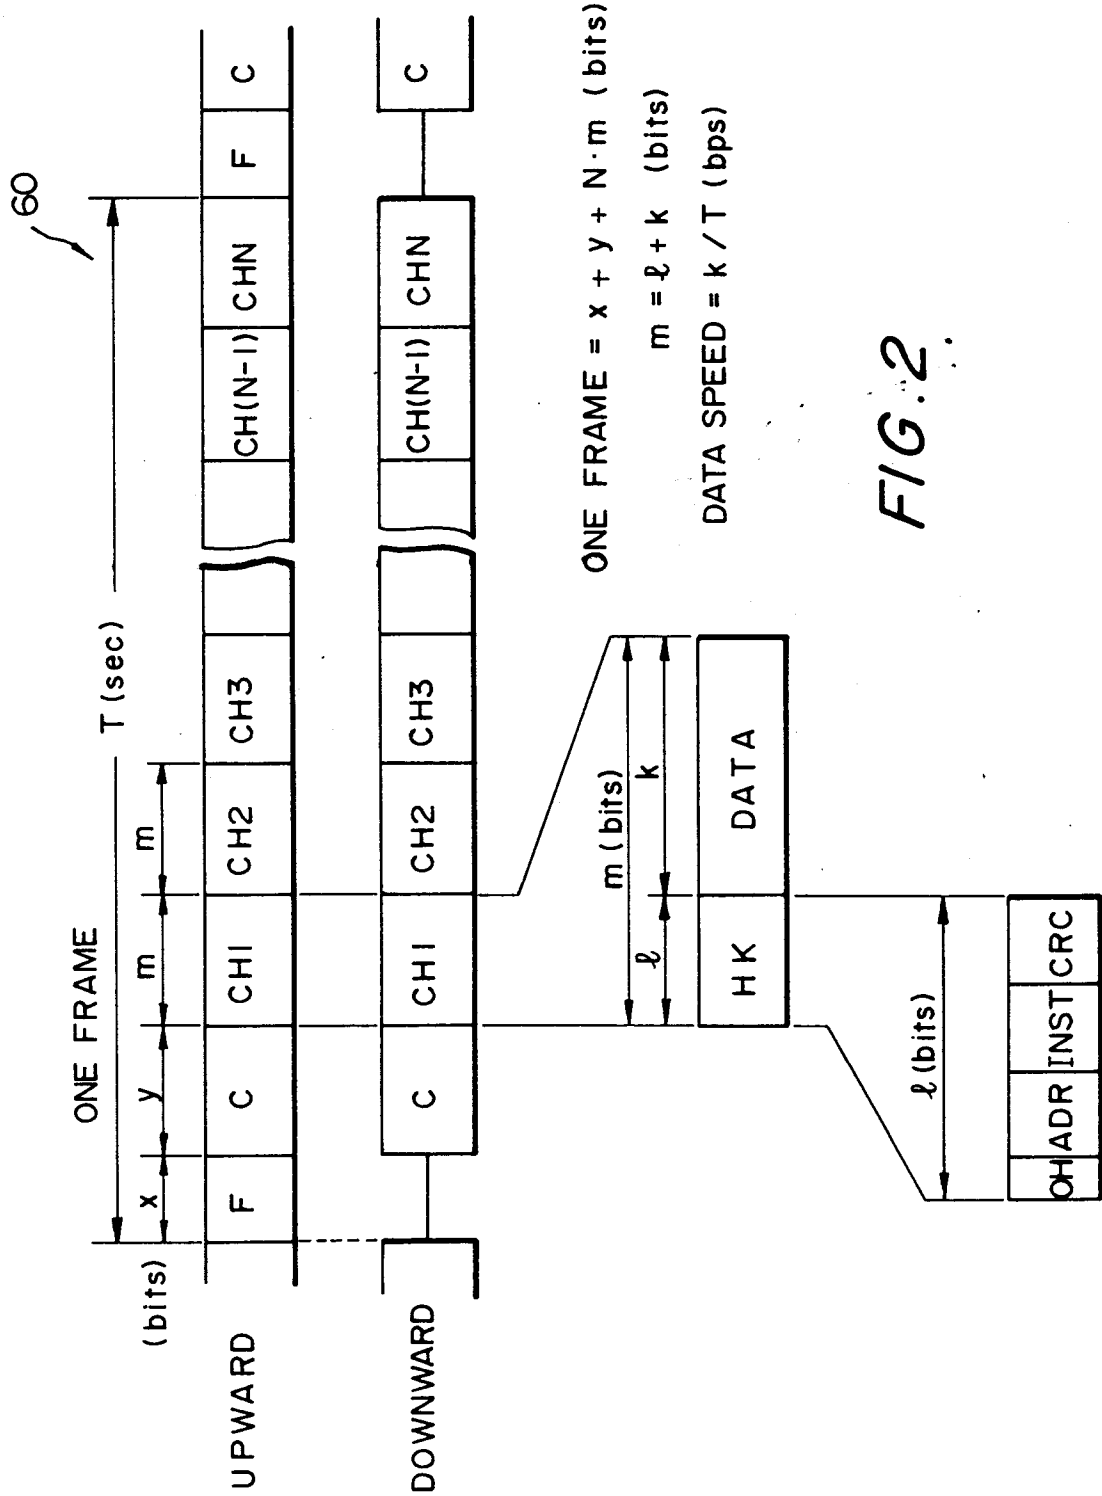


FIG. 2

FIG. 3

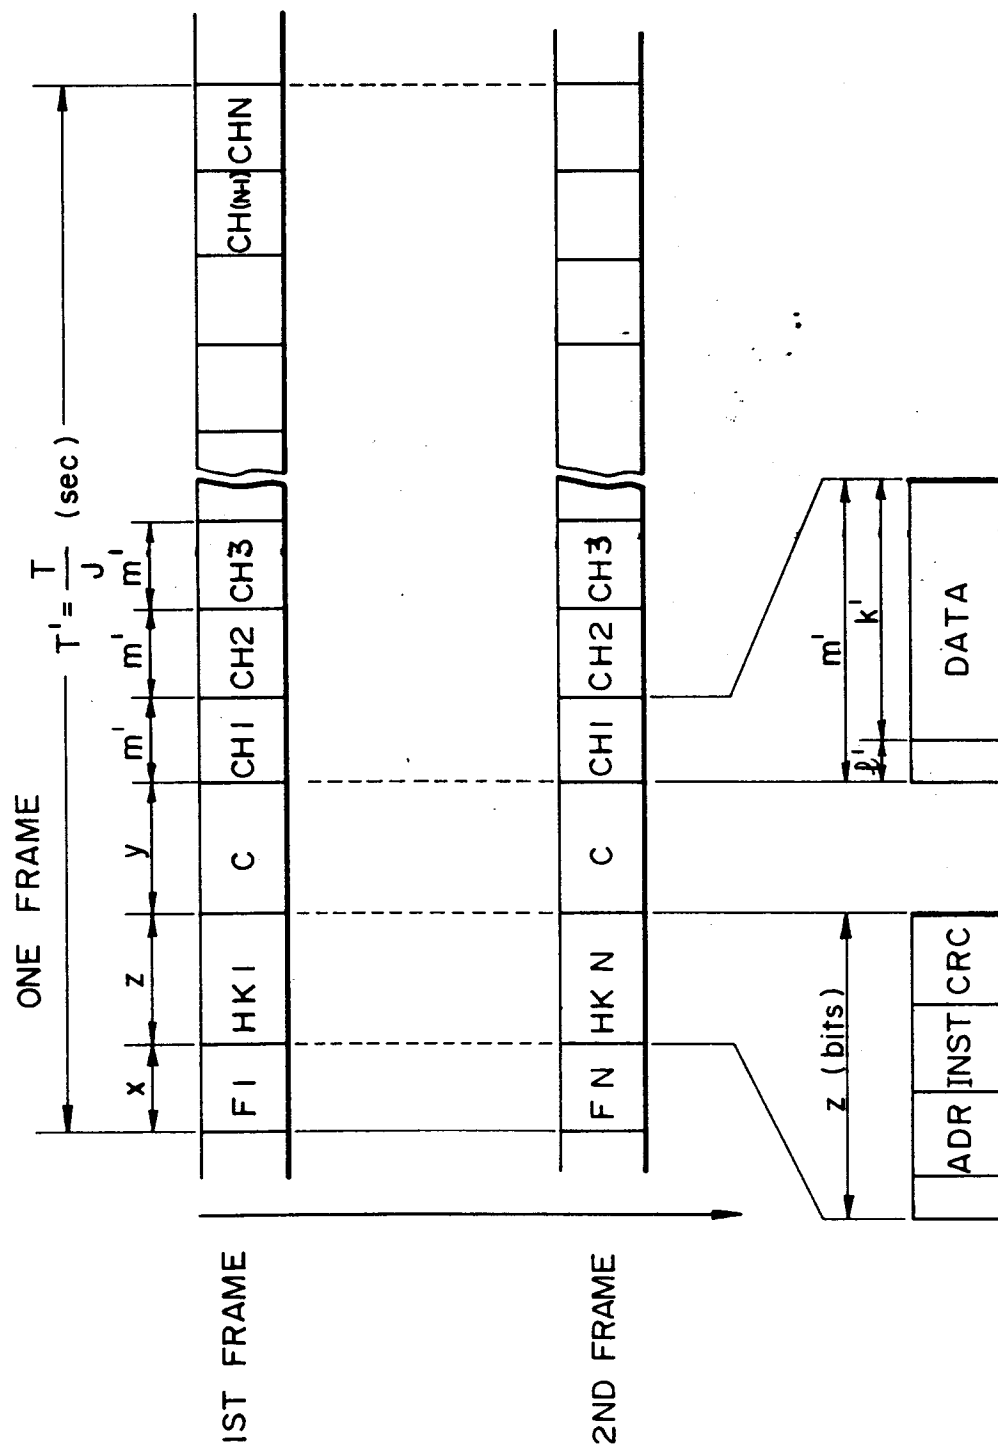


FIG. 4

